


Brokk with a powerful scabbler

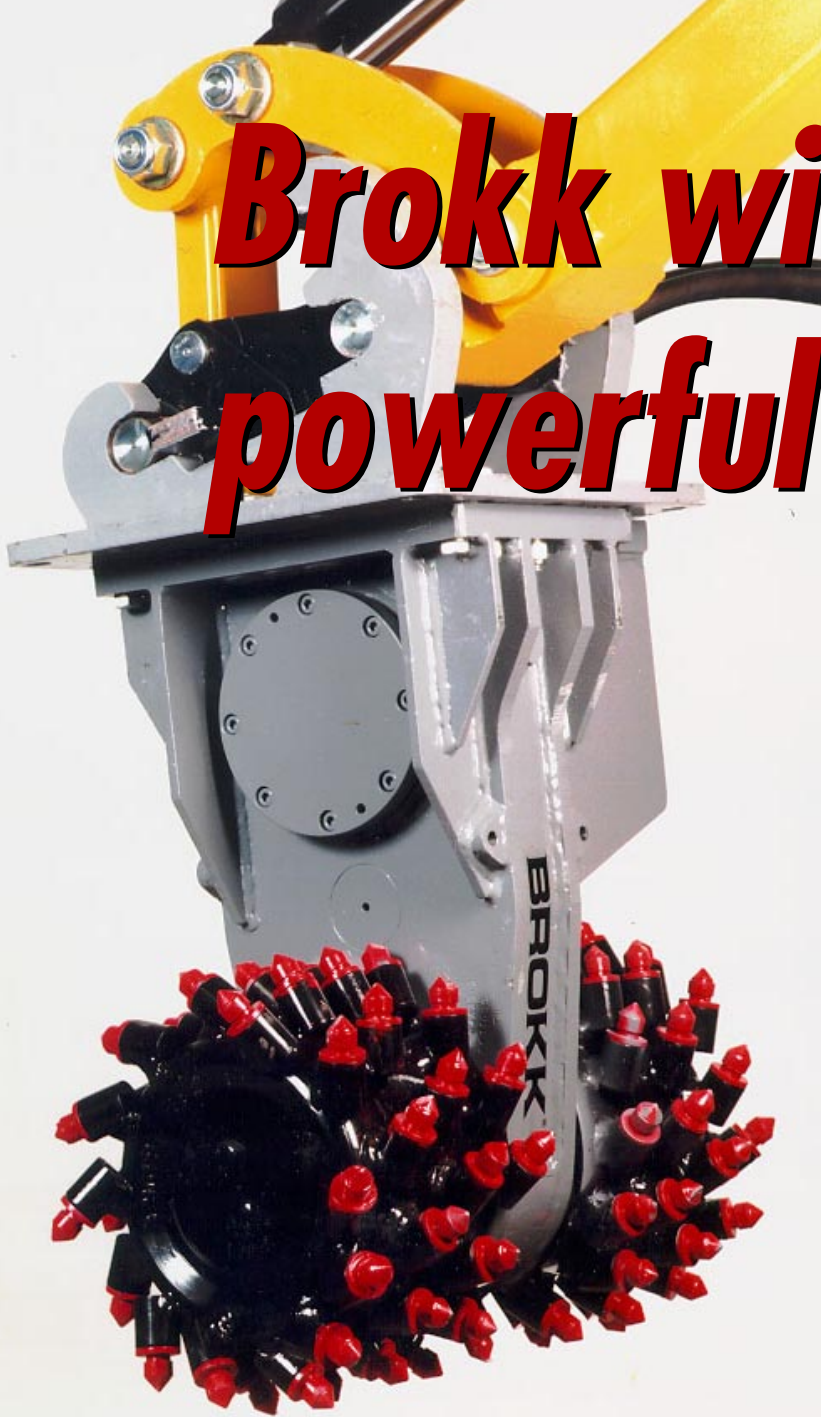

Brokk

WS-15HD

WS-30HD

Equipping your Brokk machine with a scabbler enables you to do even more profitable work. The scabbler provides an excellent and efficient demolition in every project where the surface layer needs to be removed. The concept behind the scabbler has proven to be successful over the course of several years, and has now been adapted to Brokk. The scabbler's unique features are now combined with all the advantages of the Brokk concept, such as remote control and flexible demolition capacity.

We recommend the scabbler for renovation of concrete surfaces, such as floors, walls etc. The scabbler's teeth remove old, damaged or excess concrete, leaving a surface with excellent adhesive properties. There is no risk of cracking when working on bridges or in tunnels. Compared to other methods, the scabbler avoids problems that arise when water is used.

In the process industry there are several applications, in which the scabbler can prove helpful, such as the renovation of interior coating on cast lining and the removal of slag.

The optional depth limitation device (for positions 5-30 mm) makes it simple to remove the exact amount of concrete desired.

The scabbler models WS-15HD and WS-30HD can be used on Brokk machines. The scabbler comes with a complete mounting kit, as well as tools for easy change of worn down teeth.

For other scabbler models please contact Brokk AB or your local representative.

Brokk with a powerful scabbler

Brokk

WS-15HD
WS-30HD



Facts	Products					
	Brokk 40	Brokk 90	Brokk 90	Brokk 180	Brokk 230	Brokk 330
Weight, kg (lb)	380 (794)	830 (1830)	930 (2050)	1900 (4190)	3060 (6750)	4100 (9030)
Width min. mm (in)	600 (23,6)	780 (30,7)	780 (30,7)	800 (31,4)	1200 (47,2)	1500 (58,5)
Height min. mm (in)	740 (28,8)	1210 (47,6)	1210 (47,6)	1342 (52,8)	1760 (69,3)	1540 (60,6)
Motor output, kW	4	7,5	11	15/18,5	22	30
Recommend./max. weight attachment, kg (lb)	60 (132)	75 (165)	120 (265)	230 (507)	350 (771)	550 (1210)

Technical specifications

WS-15HD

Maximum input power	18 kW
Recommended flow	40-60 lpm
Maximum pressure	375 bar
Output shaft torque	1515 Nm at 210 bar
Output shaft speed	89 rpm at 40 lpm
Unit weight	191.5 kg (421 lb)
Hydraulic oil	HV 46 or HV 68

WS-30HD

Maximum input power	30 kW
Recommended flow	120 lpm
Maximum pressure	375 bar
Output shaft torque	5340 Nm at 300 bar
Output shaft speed	107 rpm at 120 lpm
Unit weight	330 kg (727.5 lb)
Hydraulic oil	HV 46 or HV 68



Brokk AB
P.O. Box 730
SE-931 27 Skellefteå, Sweden
Tel +46 910 711 800
Fax +46 910 711 811
E-mail: info@brokk.com, www.brokk.com